SKUDO BOARD® INTERLOCK

Learn More!

Skudo®

Description

SkudoBoard INTERLOCK is a heavy duty, synthetic, rigid board that provides superior protection under forklift and general construction traffic. The interlocking tabs keep the board from slipping and moving out of place, while the fabric underside provides an extra layer of protection from chips, dents, scratches, scuff marks, or other damage to your surface.

Use SkudoBoard Interlock wherever you would traditionally protect your surfaces with Masonite or plywood. Ideal for use under work stations - pipe cutting, finish carpentry, painting. Easy to layout and repack for quick mobilization on after-hours projects.

The textured surface of SkudoBoard INTERLOCK provides high slip resistance in addition to being fire retardant and water resistant. SkudoBoard INTERLOCK is resistant to curling and warping - reducing safety hazards on your jobsite. The high compression strength protects from dropping objects and spreads the load under forklifts, keeping your floors safe. It can also be used for extreme vertical protection.

Features & Benefits

- Interlocking tabs keep SkudoBoard securely in place
- Water resistant, can be used on exterior surfaces
- Replaces curling Masonite and plywood
- Fire Retardant (ASTM E 648 Class 1, 16 CFR 1630)
- Test-proven slip resistance in wet conditions (ANSI/NFSI B101.3-2012)
- Extremely high impact resistance – spreads impact loads
- Ideal for use under work stations – i.e. pipe cutting, finish carpentry, painting.
- Ideal for forklift and material cart protection
- Well suited for protecting floors from jobsite traffic and debris
- Light weight, easy to handle and reusable
- Far superior to cardboard protection products
- Edge pieces included to fill in gaps when placing against walls




Extremely high impact resistance



Interlocking tabs hold product securely in place



Superior protection under forklifts and material carts

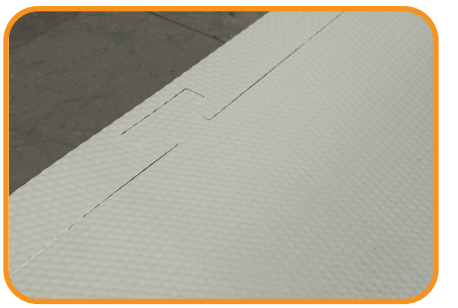

Edge pieces provide seamless border coverage

Innovative, purpose-built surface protection systems. This is all we do.

www.skudousa.com 1-888-SKUDO-11 (1-888-758-3611)

V2.0 10.28.2026


SKUDO BOARD INTERLOCK

Skudo®

SkudoBoard INTERLOCK Product Data

SkudoBoard Interlock

- Dimensions: 3.75' x 3.75'
- Square Footage: 14 sq. ft./board
- Weight: 4 lbs/sheet
- Thickness: 5mm (1/4")
- Color: Light Gray
- SKU #BOARD-HT-FR-3.75-INTRL



Application


Clean the area of dirt, dust, and debris before applying to ANY surface.

SkudoBoard Interlock panels lock into place by pressing down firmly on the interlocking tabs. The panels stay in place without tape under foot traffic and light cart or ladder traffic.


Install edge pieces around the perimeter to help prevent gaps and protect the edges of the covered area.

Note: Although SkudoBoard Interlock is designed to stay in place without tape, taping the seams can provide added stability in areas where heavier traffic is expected.

*Visit our website (**www.SkudoUSA.com**) for more best practices and additional SkudoBoard protection solutions, including Standard & Fabric Back, Column Guard, Stair Guard, Corner Guard, ResiBoard, and BEASTBoard.*

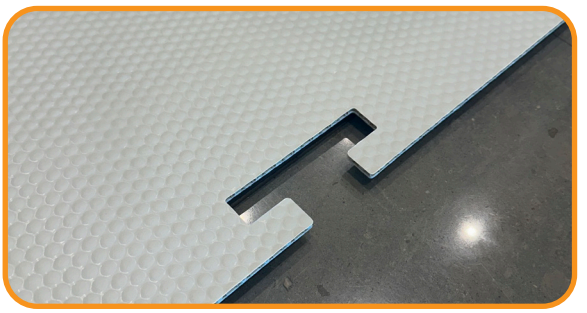

Connect boards at interlocking tabs

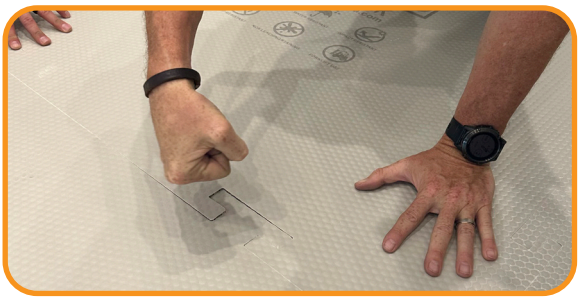

Firmly press in tabs to secure



Install edge pieces along the perimeter

Innovative, purpose-built surface protection systems. This is all we do.